

WITH THE AGILOX BOX CARRIER, BOXES AND TRAYS CAN BE TRANSPORTED EFFORTLESSLY

BOX CARRIER

The AGILOX BCO (Box Carrier) is an additional module that the AGILOX ONE can hold like a Euro pallet. Power and controls are transmitted via CAN bus and the connection is made automatically – no human intervention is necessary to complete the retooling process. The upper part standard consists of two belt conveyors. On request, the conveyor technology can be expanded to up to eight conveyors on four levels.

DIMENSIONS

(L x W x H)

1,161 MM × **800 MM** × **250 MM**
46 IN × **31 IN** × **10 IN**

LOAD CARRIER

55 KG
123 LBS

max. box weight

400 MM
16 IN

max. box width

600 MM
24 IN

max. box length



Box Carrier single level
with belt conveyor

DELIVERY HEIGHT

250 MM
10 IN


min. delivery height

860 MM
34 IN

max. delivery height
single scissor lift

1,365 MM
54 IN

max. delivery height
double scissor lift

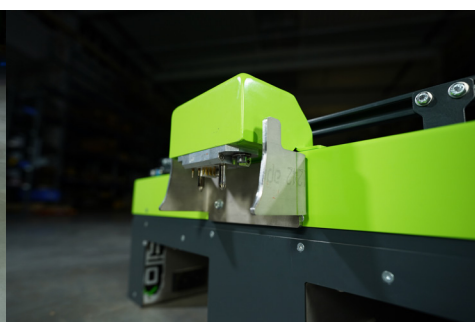

MAXIMUM EFFICIENCY

**ALL PRODUCTS WITH
THE PROVEN AGILOX
CORE INTELLIGENCE**



VARIATION BCO

1 to 4 levels

Number of levels

Height of the levels individually designable

Level height

Between 2 and 8 conveyors


Number of conveyors

Roll or belt conveyor


Conveyor type

Integrated scale

Optional add-on

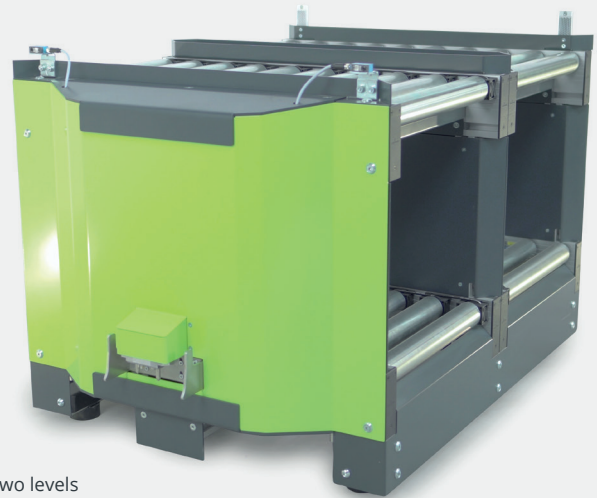

Box Carrier two levels with roll conveyor

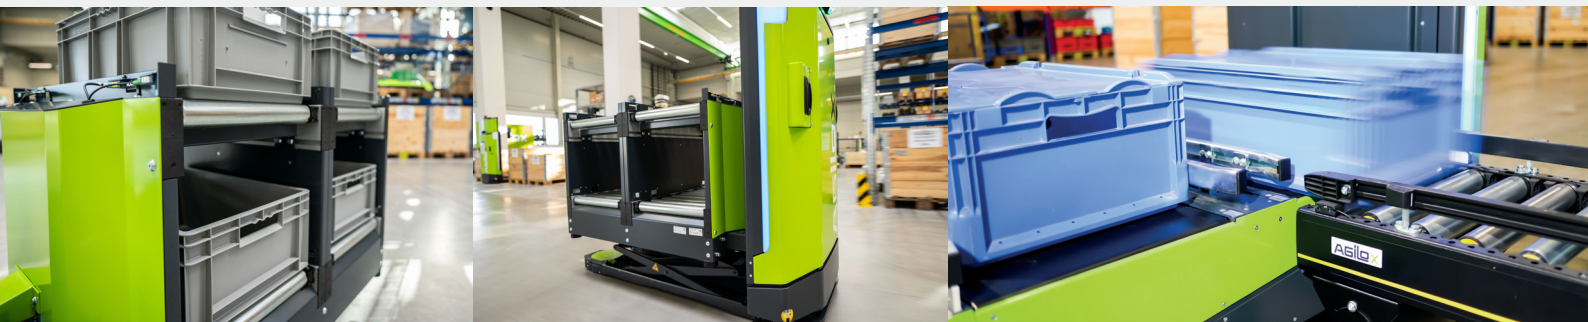

CONNECTOR ONE / BCO

ONE connector for BCO



Connector BCO

